

40' NO-TILL IMPLEMENTS

from



Us of the 10HD series opener has been expanded to include the 3N-4010HDA no-till air implement. This implement utilizes a floating tongue and 12 degrees of wing flex up and down to follow contours and negotiate uneven terrain.

The heart of this implement is the parallel linkage 10HD opener with over 10 inches (25.4cm) of vertical travel, 15" (38.1cm) 4-millimeter disk blades and heat treated blade separators to provide an accurate seed furrow. The "Clear Shot" planter seed tube and T-handle depth wheels make sure the seed is planted at a consistent depth ensuring even emergence. This

versatile opener has up to 500 pounds (226.8kg) of down force and may be used with or without unit mount coulters. Opener options include unit mount or frame mount coulters, choice of press wheels, Keeton Seed Firmers and 2 different scraper options.

Dimpled towers randomize the seed in the air flow and the transition cone at the top of the tower gently changes the seeds direction providing even seed flow to all rows.


Team this implement with the ADC2350 Pull-Behind Cart and you have one highly productive seeding system.

NARROW TRANSPORT



The 3N-4010HDA provides an innovative folding design that tucks nicely behind the tractor and is only slightly wider than the outside duals on most tractors.

FLOATING TONGUE

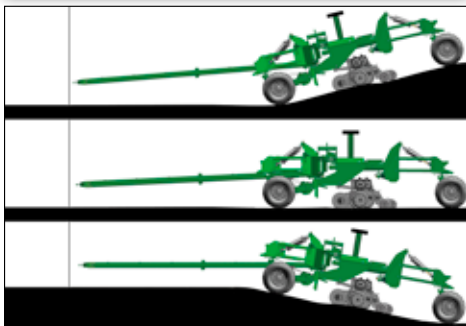

Provides superior terrain following because unit pivots independently of the tongue.

HIGH FLOTATION



The implement is carried on 6- 18 x 22.5 tires; providing increased accuracy and reduced field compaction.

TRANSITION CONE



Insures smooth transition of seed into individual tubes eliminating seed damage associated with competitive drills.



Shown with ADC2350B Pull Behind Cart and Options

BLOCKAGE MONITORS (OPT)



Sensors located on individual seed tubes verify seed delivery to openers.

PULL-BEHIND CART



The ADC2350B Pull-Behind cart carries 350 bushel (12.333 L) of seed and fertilizer onboard to decrease stops and increase productivity.

HEAVY DUTY MARKERS



Heavy duty markers are designed for the rigors of no-tilling. Flat fold design keeps them out of the way when not in use.

SPECIFICATIONS

Model Name	3N-4010HDA
Row Spacing	7 1/2" (19.05cm), 10" (25.4cm)
Number of Openers	66, 48
Weight (empty)	48850 lbs (22158kg) (implement and 2350 cart)
Working Width	40' (12.2m)
Transport Width	13' 8" (4.2m)
Transport Clearance	20" (50.8 cm)
Height	12' (3.65m)
Length	70' (21.33m)
Tire Size	18 - 22.5
Opener Travel	10" (25.4cm)
Opener Depth Settings	0 to 3.5" (0 to 8.89cm)
Opener Down Pressure	250 to 500 lbs (113.4 to 226.8kg)
Coulter Preload	450 lbs (203kg)

OPTIONS

- Markers
- Coil Tine Harrows
- Choice of Press Wheels
- Keeton Seed Firmers
- Seed-Lok Wheels
- Air Design Disk Scrapers
- Blockage Monitor (Individual rows)
- Fluted, Wavy or Turbo Blades

Note: All specifications subject to change without notice.
*Weights based on 7.5" (19.05cm) spacing and will vary depending on options.