


30' 3-Section FOLDING DRILL

from

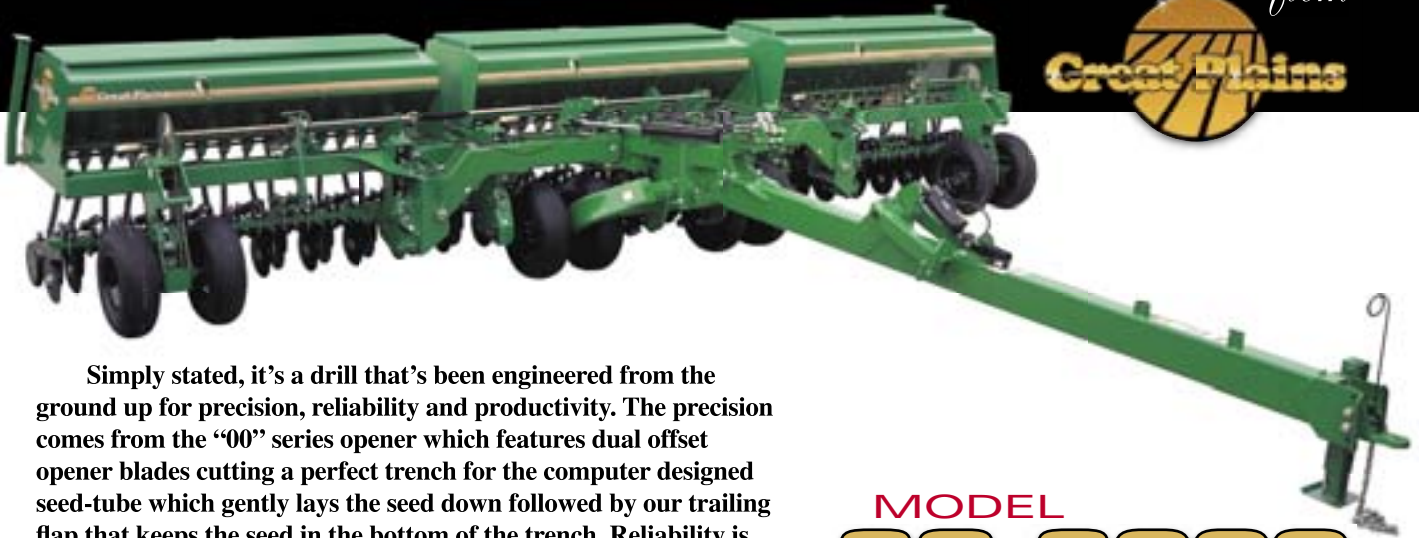

MODEL
3S-3000

Simply stated, it's a drill that's been engineered from the ground up for precision, reliability and productivity. The precision comes from the "00" series opener which features dual offset opener blades cutting a perfect trench for the computer designed seed-tube which gently lays the seed down followed by our trailing flap that keeps the seed in the bottom of the trench. Reliability is built into every aspect of the 3S-3000, from initial torture track testing to months of in-field testing to the opener pivots which use Capron® wear bushings and disk blades carrying triple-lip seals that keep dirt out of the extra-large bearings. Productivity is having a 3.2 bushel per foot seedbox and quicker cycle times on end turns.

Ground hugging front-to-rear flexibility provides uniform seeding depth in rolling terrain. Like the 40' model, the wings flex upward 20° and downward 15° for superior performance in terraced ground. When you consider all of the features on the 3S-3000 from Great Plains, we think you'll agree we've once again raised the standard for productivity.



Great Plains

HYDRAULIC DOWN-PRESSURE DRILL SPECIFICATIONS



4-Speed Sprocketbox



By-Pass Valve



Walkboard and Ladder



Safety Lighting Package



1 3/4" wide Fluted Feed Cup



Independent Opener Travel



Weatherproof Lids



V-Bottom Dividers



In-Line Filter



Keeton or Seed-Lok®
Seed Firmers



Skid Steer Tires

FEATURES & BENEFITS

Feature	Benefit
4-Speed Sprocketbox	Provides excellent metering of a large variety of seed shapes and sizes.
By-Pass Valve	Reduces hydraulic oil heating.
Walkboard and Ladder	Wide non-skid walkboard and ladder provide easy access the full width of the machine.
Safety Lighting Package	Provides a high level of visibility and safety during transport.
Fluted Feed Cup	Provides gentle and even delivery of a wide variety of seed sizes and shapes.
Independent Opener Travel	Cylinders on both ends of each gang allow it to hug terrain independent of the drill box.
Weatherproof Lids	Hydraulic lid protects seed and fertilizer from the elements.
V-Bottom Dividers	Provide even and complete seedbox clean out.
In-line filter	Reduces oil contamination.
Keeton or Seed-Lok®	Firms soil creating excellent seed-to-soil contact. (Optional)
Skid Steer Tires	Provides greater flotation. (3 section models only) (Optional)

OPTIONAL EQUIPMENT

Press Wheels (pg. 5)	Markers	Keeton Seed Firmers
Seed Cup Plugs	Point-Row Clutches	Seed-Lok® Seed Firmers
Fertilizer Attachment	Shaft Monitors	Open Center Kit
Small Seeds Box	Skid Steer Tires (3000 & 4000 only)	Air Design Scrapers

SPECIFICATIONS

Model Name	2S-2600			3S-3000			3S-4000		
Row Spacing	6"	7 1/2"	10"	6"	7 1/2"	10"	6"	7 1/2"	10"
Number of Openers	52	42	32	60	48	36	78	63	48
Weight*	11760 lbs.			11890 lbs.			17600 lbs.		
Working Width	26'			30'			40'		
Transport Width	15'			15'			15'		
Transport Clearance**	1' 5"			1' 5"			1' 5"		
Height	8' 2"			8' 2"			7' 4"		
Length	26' 4"			30'			34' 8"		
Seedbox Capacity	86.4 bu.			97.2 bu.			128 bu.		
Seed/Fertilizer Capacity	See pg. 7			See pg. 7			See pg. 7		
Tire Size Std.	11" x 15" w/ 9.5" x 15"			11" x 15" w/ 9.5" x 15"			11" x 15" w/ 9.5" x 15"		
Optional Skid Steer	N.A.			10" x 16.5" w/ 10" x 16.5"			15" x 16.5" w/ 10" x 16.5"		
Opener Travel	8"			8"			8"		
Opener Depth	0" to 3 1/2"			0" to 3 1/2"			0" to 3 1/2"		
Opener Down-Pressure	90 lb. To 180 lb.			90 lb. To 180 lb.			90 lb. To 180 lb.		
HP Requirements (est.)	110 min.			125 min.			180 min.		

*Note: Weights based on 7.5" spacing and will vary depending on options.

**Transport clearance will vary depending on tractor.