

12 & 16 Row Yield-Pro® Planters



Yield-Professionals

Simply load the onboard 82 or 150 bushel poly hoppers and start planting or if you want seed directly from the seed companies bulk box. A 400 gallon starter fertilizer system featuring ground driven CDS-John Blue piston pump may also be added to planters equipped with a seed company bulk box or 82 bushel hopper.

The patented air manifold delivers seed on demand to the row unit meters without any moving parts; increasing reliability while decreasing maintenance costs. On the row unit, you have the choice of the Air-Pro® Seed Metering System with interchangeable seed plates for all crops or a mechanical system with

precision Population Max™ or Singulator-Plus™ meters accurately singulate the seed for precise spacing.

A variety of row spacing options are available for the Yield-Pro® Planter which include 30", 20", 15", Twin-Row 30", and Twin-Row 36" spacing that are harvested with a standard 30" or 36" corn head. Other options include: variable rate hydraulic drive, Keeton Seed Firmers®, Seed-Lok®, *400 gallon starter fertilizer system, frame mounted coulters, unit mounted coulters and/or row cleaners.

(*400 gallon starter fertilizer not compatible with 150 bushel hopper.)



"Setting the pace through innovation."



Other features include:

- Telescoping Tongue retracted in the field, enhancing maneuverability on headlands.
- Using seed companies bulk box with treated seed keeps operator safer than breathing treatment dust when filling individual hoppers.
- No planted rows are run over on 20", 30" or twin-row models. Only 2 rows are run over on 15" spacing, unlike competitors who run over 4 to 6 rows on their 15" models.
- Unobstructed front and rear access to all row units regardless of spacing.
- All seed and fertilizer weight is carried on the large radial tractor tires insuring that all row units plant the same regardless of whether or not the bulk hopper is full or empty.



Features



- 1. NARROW TRANSPORT** - Yield-Pro® planters fold to narrow transport widths for safe and easy road travel.
- 2. TELESCOPING TONGUE** - The telescoping tongue puts planter closer to tractor in field position allowing tighter turning on end rows.
- 3. BULK SEED BOXES** - Poly Hoppers and Seed Companies bulk seed boxes are completely interchangeable.

Specifications


MODEL INFO	YP-1225	YP-1625
ROW SPACINGS	TR30", TR36", 15", 20", 30"	TR30", TR36", 15", 20", 30", 36"
NUMBER OF OPENERS	24-TR30", 16-TR36", 23-15", 18-20", 12-30"	32-TR30", 24-TR36", 31-15", 24-20", 16-30"
TIRE SIZE	Rear 380/90R46, Wing 395/55B16.5	Rear 380/90R46, Wing 395/55B16.5
DIMENSIONS		
WORKING WIDTH	30'	40'
WIDTH (transport)	13' 6"	13' 6"
HEIGHT (transport)	12' 6"	12' 6"
LENGTH (transport)	12 Row 36' 2"	16 Row 41' 2"
CLEARANCE (transport)	22"	22"
OPENER INFO		
OPENER SERIES	25 Series	25 Series
OPENER TRAVEL	10"	10"
OPENER DEPTH RANGE	0 to 4"	0 to 4"
OPENER DOWN PRESSURE	200 to 500 lbs	200 to 500 lbs
CAPACITIES		
SEED HOPPER CAPACITY	Bulk-Box System (Box Not Included), 82 bu Poly Hopper, 150 bu Poly Hopper	Bulk-Box System (Box Not Included), 82 bu Poly Hopper, 150 bu Poly Hopper
FILL HEIGHT	108" with seed company Bulk Box, 110" with 82 bu Poly Hopper and 117" with 150 bu Poly Hopper	108" with seed company Bulk Box, 110" with 82 bu Poly Hopper and 117" with 150 bu Poly Hopper

OPTIONS


FLAT FOLD MARKERS (DEDUCT)	HYD. TONGUE	UNIT MOUNT COULTERS	FLUTED OR TURBO BLADES	CHOICE OF PRESS WHEELS
400 GAL LIQUID FERTILIZER KIT	HYD. DRIVE INTELLIAG	SEED-LOK®	KEETON SEED FIRMERS®	TERRA-TIME ROW CLEANERS
18.4-42 CARRIER TIRES	STARTER & HIGH RATE MANIFOLDS	POPULATION MAX™ METERS	SINGULATOR-PLUS™ METERS	AIR-PRO® SEED METERING SYSTEM

Note: All specifications subject to change without notice.

Air-Pro® Seed Metering System

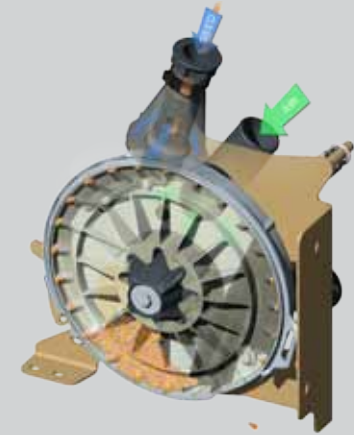

The Air-Pro® Seed Metering System has a *99% accuracy that utilizes automatic positive air supply provided with one fan for both bulk seed delivery and metering. Competitors use 2 fans, one for the meters and another for bulk delivery dramatically increasing hydraulic requirements. Meter wheels are extremely easy to install with just a twist of the wrist. Meters include a rain cap to protect the meter wheels and seed from the elements. Meter tests show exceptional brush durability but if you should ever have to remove the brushes just turn the 1/4 turn latches and remove the brush assembly. ***99% accuracy refers to medium round corn seed.**

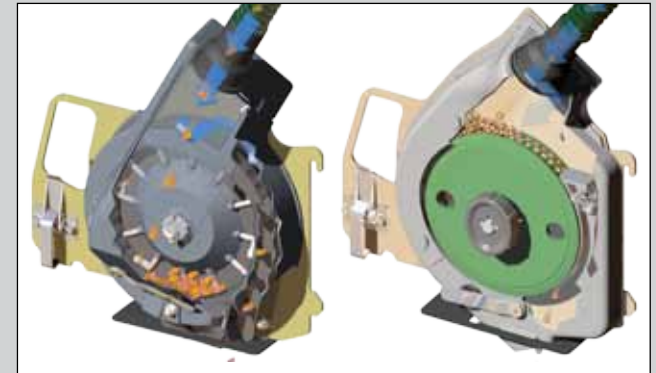

- 1. POPULATION MAX™** - Provides the highest level of accuracy available in a Finger Pickup meter. Features include composite backing plate, Skip Stop™ pad, and the SureFire® seed belt.
- 2. SINGULATOR-PLUS™ METER** - This design features a series of pockets to singulate the chosen crop, this simple meter has very few moving parts and low maintenance costs.



Great Plains Manufacturing Incorporated
 1525 E. North Street • Salina, Kansas 67402-5060
 p. 800-255-0132 • f. 785-822-5600
www.greatplainsmfg.com