

• Photo may show optional equipment not supplied with standard unit.

Seeding with planter accuracy on narrow rows is now a reality. The 30' Precision Seeding System™ from Great Plains features the Ultra-Narrow Row Unit™ and SingulatorPlus™ Meter. Together this system provides the accuracy of a planter on row spacing as narrow as 7-1/2".

rows. The exclusive engineering of the SingulatorPlus™ allows you to singulate seeds such as corn, soybeans, cotton and milo, or volumetrically meter wheat and rice. And, our wide selection of meter wheels let you switch from crop to crop in a minimal amount of time.

Switching row spacings from 7-1/2" to 15" to 30" to Twin Row 30" or 10" to 20" to 30" is as easy as removing a pin and sliding the fill tube to the "OFF" position on the desired

Choose the 3N-4010F or 3N-4020F models if you only need a heavy duty no-till drill with our fluted feeder cups.

Features			
Features	Page#		
Water Tight Lids	63		
Folding Walkboard	70	Acremeter	70
Opener Features	60	Seed Level Indicator	63
V-Bottom Dividers	63	Precision Meter	50
Telescoping Seed Tubes	72	Transport Lights	70
Planter Style		Sprocket Transmission	62
Speed Change Sprockets	62		

Options			
Options	Page#		
Weight Bracket	69		
Marker	68	Seed Tube Plugs	72
Monitors	72	Coulter Options	59
Point Row	71	Press Wheel Options	58
Meter Wheels	51		
Seed-Lok®	61		

Opener Options	
Openers	Page#
10P Series	52
20P Series	53


30' Precision Seeding System Specifications

Model Name	3N-4010P, 3N-4010F					3N-4020P, 3N-4020F				
	10 Series Singulating					20 Series Singulating				
Row Unit Type	7.5" (19.05cm) 10" (25.40cm) 15" (38.1cm) 30" (76.2cm) Twin Row					7.5" (19.05cm) 10" (25.40cm) 15" (38.1cm) 30" (76.2cm) Twin Row				
Number of Openers	64-7 1/2", 48-10", 31-15", 16-30", 32-Twin -Row									
Weight	29540lbs (13399 kg)									
Working Width	40' (12.19m)									
Transport Width	13' 10" (3.99m)									
Height	8' (2.43m)									
Seed Box Capacity	96bu									
Tire Size	33x15.5-16.5									
Opener Travel	10" (25.4cm)									
Opener Depth	0 to 3.5" (0 to 8.89cm)									
Opener Down Pressure	90 to 180lbs (40.82 to 81.64kg)					100 to 225lbs (63.5 to 102kg)				

Note: Weights based on 7.5" spacing and will vary depending on options.

Floating Hitch

Pull bars pivot independently to ensure consistent seed placement over terraces and uneven terrain.

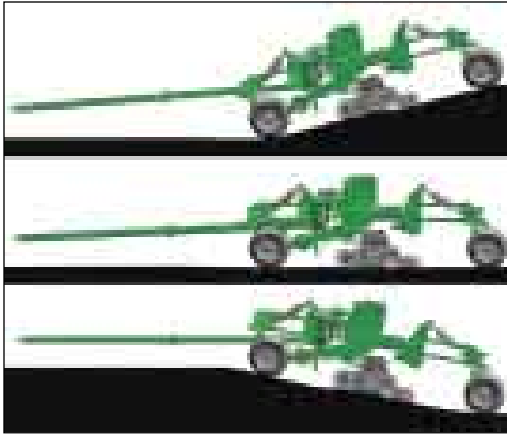

13' 10" Transport Width

Narrow 13' 10" road transport width. The pull bars are floating; no tongue weight is transferred to the tractor when folded. Wide 40' field width with no negative tongue weight and no gauge wheels past the end of the seed box.



Variable Population Control

Control all seed population adjustments from the cab with the population control console. It is fully GPS compatible, and allows for both automatic and manual on the go population changes.



12 Tire Flotation

12 33x15.5x16.5 stubble resistant tires provide 2220 square inches of flotation. The directional tread also keeps the tires turning in soft field conditions further aiding in the drills overall flotation.

