



3P1006NT Model Shown With Optional Native Grass and Small Grass Boxes



Narrow Transport

Great Plains has expanded its compact drill line to include mounted 8 & 10 foot no-till models. The 3P806NT & 3P1006NT utilize the "06" series opener to properly place seed. The coulters are pre loaded to 450 pounds insuring proper penetration even in the toughest conditions. The coulters are non-swiveling for added stability and improved tracking on slopes. Our double disc configuration and full length seed tube insures that the seed is placed consistently at the depth chosen. Additional seed tubes are used to place both native grass and small seeds. This allows three seeds to be planted at separate rates at the same time. Depth control is handled by the 18 position T-handle press wheel adjustment.


The main seed box is a fluted feed design. The seeding rate is set with the four speed transmission and the adjustable gate opening. The native grass box uses our proven "picker wheel" to meter the seed. Rates are adjusted by varying the speed of the drive. Lastly the small seeds attachment is a smaller version of our fluted feed system and seeding rates are set by changing the width of the fluted feed. The positive ground drive system automatically disengages when lifted, simplifying the unit and enhancing its reliability.



06 Series



MODELS 3P806NT
3P1006NT

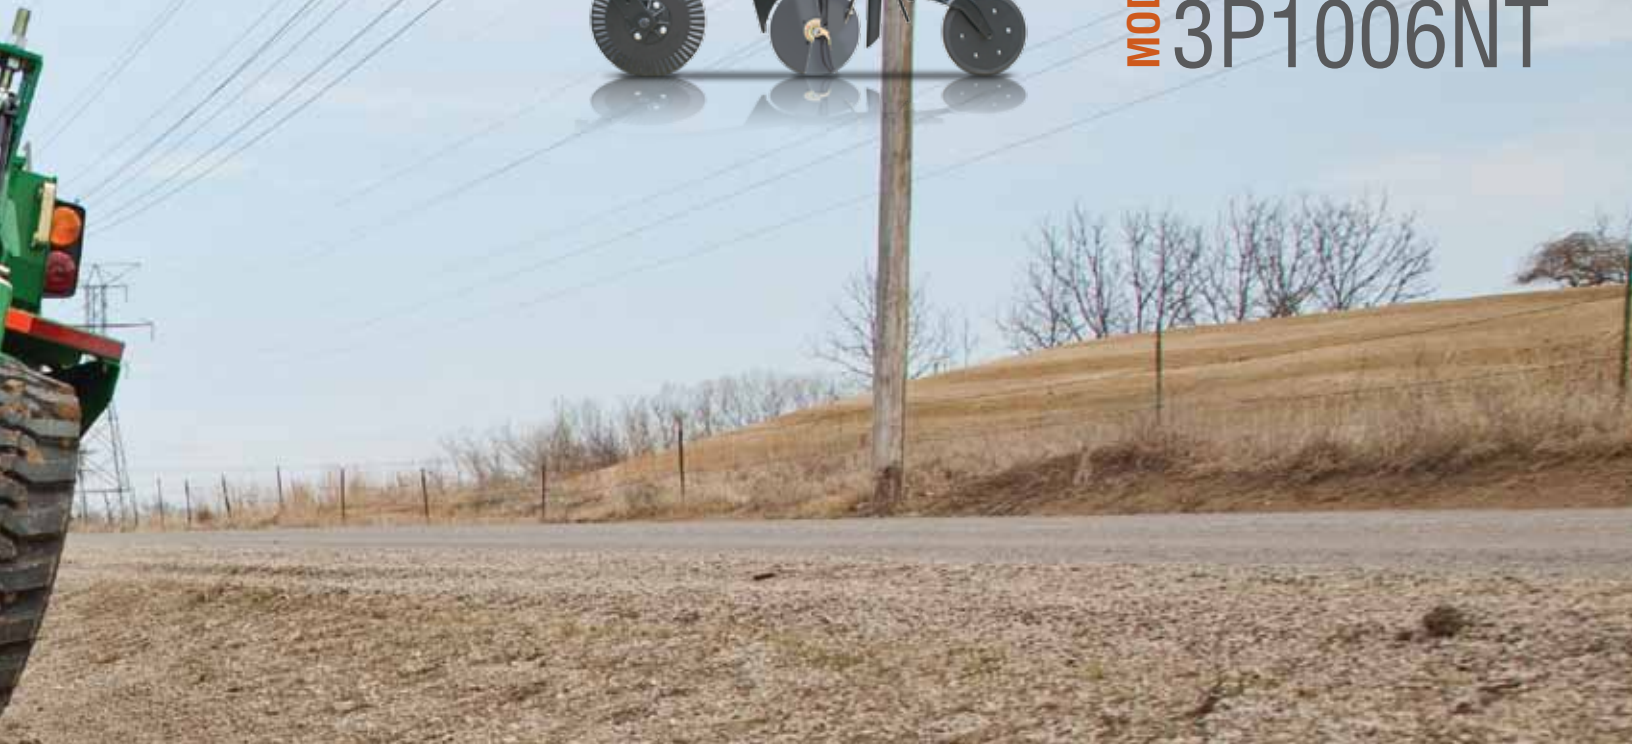

3P1006NT Model Shown

3P806NT Model Shown

CAPABLE
3 BOX 3 SEED 3 RATE
3 3 3



FEATURES & BENEFITS



MULTIPLE BOX COMBINATIONS - Start with the standard 2 bu. per ft. main seed box, then add either a 2nd seed box for dual seed, a dry fertilizer box, or a native grass box. Additionally you can add a small seeds box to the main box or add it to the dual seed/fertilizer/native grass box choice.



LIFT ASSIST - 2 lift assist wheels in the rear of the 3P806NT & 3P1006NT models provide greater lift capacity and assist the 2-point. Castered heavy duty skid steer tires and straddle axles allow high flotation, maneuverability and strength.



2-POINT MOUNTED - Allows the drill to work independently of the tractor on hills and valleys (3P806NT & 3P1006NT). 3-Point mounted is available for the 3P806NT only, but the lift assist must be removed (CAUTION: When using the 3P806NT as 3-point mounted use a tractor of adequate size, this machine is heavy).