

HD SEED/FERTILIZER NO-TILL DRILLS



Unit shown with optional Frame Mounted Coulters




MODEL 3S-4010HD/HDF

One look at the 3S-4010HD/HDF tells you this is a drill that can get the job done! The heavy duty frame has enough weight to handle hard ground and


the toughest double crop conditions, but the six (6) massive 18 x 22.5 tires can keep it afloat when things are soggy in the spring. The 10HD opener offers 15" 4mm blades running on 205 triple-lip-seal bearings. Inside is a cast blade separator protecting the same "ClearShot" seed tube we use in all YP Planters that delivers the seed precisely to the same spot each and every time. Parallel arms keep the attack angle on the opener the same regardless of terrain. Between end-to-end box flex and the floating hitch, this unit covers the nastiest terrain with accuracy and ease. The 3S-4010HD/HDF also offers big capacity. The 3.2 bu/ft box is split 60/40 for seed and dry fertilizer. Whittle down a big job in a hurry with a 3S-4010HD/HDF from Great Plains.

SEED BOX CONFIGURATIONS

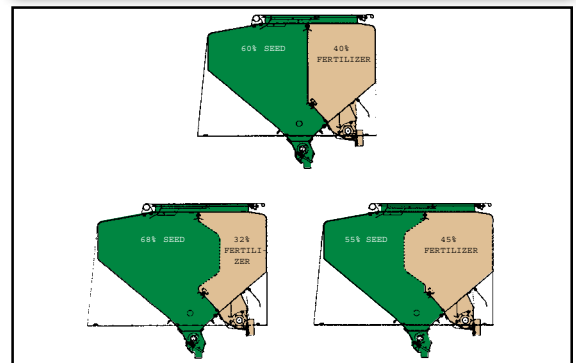

The 3S-4010HD/HDF comes standard with a 60% seed/40% fertilizer split seed box. Other configurations available are: 68%/32%; 55%/45%; and all 100% seed.

10HD SERIES OPENER

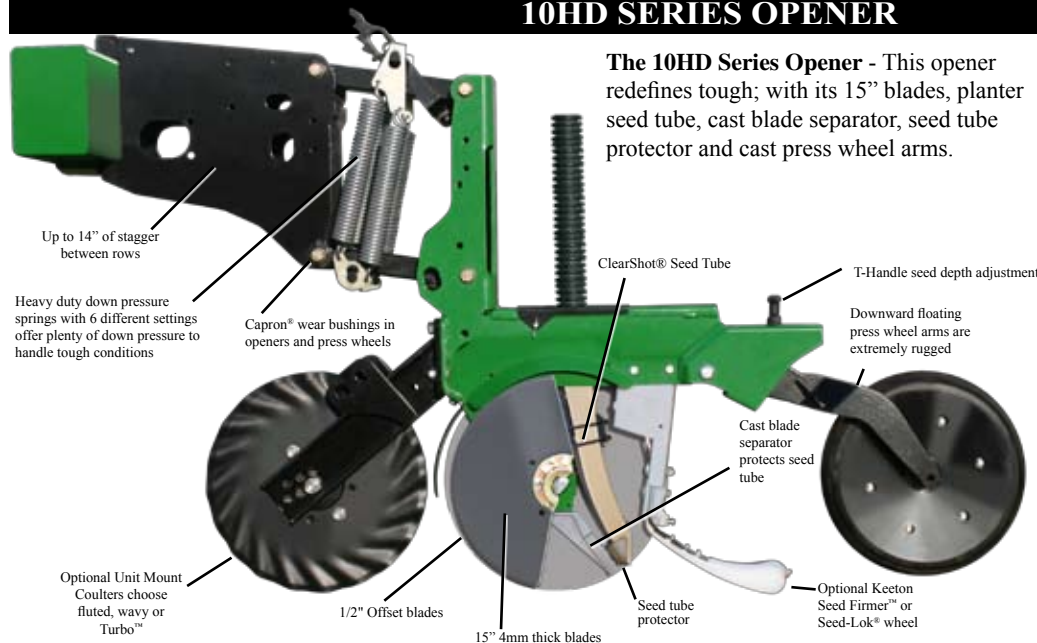

The 10HD Series Opener - This opener redefines tough; with its 15" blades, planter seed tube, cast blade separator, seed tube protector and cast press wheel arms.

Press Wheel Choices



3' x 13" Center Rib - This design firmly presses directly over the seed with the center rib of the wheel creasing the soil. This crease allows the crust to crack open for even seed emergence.




1' x 12" Double-V - This design closes the seed trench with an aggressive pinching action. It provides excellent depth control in most soil conditions.



Wedge - This design is the "Best of Both Worlds," with an aggressive tapered edge. It closes seedbeds in firm soil but a large "footprint" allows it to stay on top of loose soil.




FLOATING HITCH

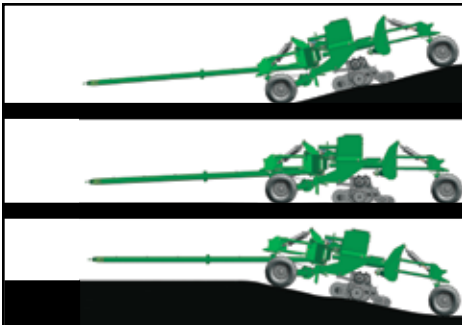

Provides superior terrain following because the unit covers the terrain independently of the tongue.

NARROW TRANSPORT

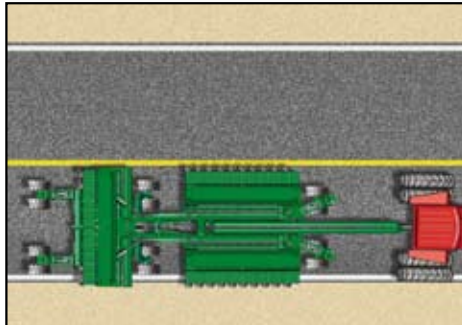

Folds to a narrow 14' 11 1/2" for safe road travel. Front gauge wheels rotate from planting position to the front for road transport.

FLOTATION TIRES



(6) 18 x 22.5 tires provide excellent flotation and reduced ground compaction in soggy fields.

SPECIFICATIONS

Model Name	3S-4010HD/HDF
Row Spacing	7 1/2", 10"
Number of Openers	64, 48
Weight	40,870 lbs. (7 1/2" spacing w/ markers, small seeds and frame mounted coulters)
Working Width	40'
Transport Width	14' 11 1/2"
Transport Clearance	15"
Transport Height	8' 10" (without markers)
Transport Length	45'
Seedbox Capacity	129.6 bu.
Standard Seed/Fert Split	60% Seed 40% Fertilizer
Optional Seed/Fert Splits	100% All Seed, 68% Seed 32% Fertiliser, 55% Seed 45% Fertilizer
Tire Size	18-22.5 NHS 16 Ply
Opener Travel	10"
Opener Down Pressure	235-500
Opener Depth Setting	0"-3 1/2"
HP Requirements (est)	275 to 400

STANDARD EQUIPMENT

3-Section, Forward Fold, Pulltype	Ground Drive
10HD Series Openers	High Flotation Tires
High Box Capacity	ClearShot™ Seed Tubes
Fluted Feed Metering	Floating Tongue
Narrow Transport Width	

OPTIONS

Unit Mount Coulters	Small Seeds
Frame Mount Coulters	Keeton Seed Firmers
Seed-Lok Firming Wheel	Markers
Fluted, Wavy or Turbo Blades	Choice of Press Wheels

Note: All specifications subject to change without notice.